


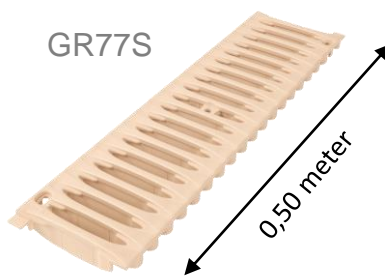
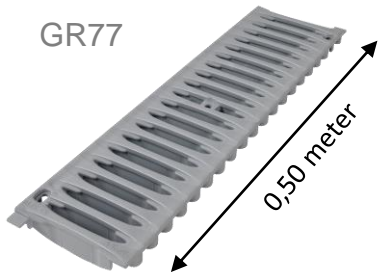


GR77 – GR77S – GR77K

GRATING PVC CLASS B125

BASIC FUNCTION :

- The grating is designed to drain run-off water. In accordance with EN1433 standard and the **CE** marking, it can be used in footways, pedestrian areas, private car parks or car parking decks in class **B125**. 



DESCRIPTION :

- Reference :

GR77

GR77S

GR77K


- Colour :

Light grey


Sand

Anthracite

- Materials : PVC, UV stable

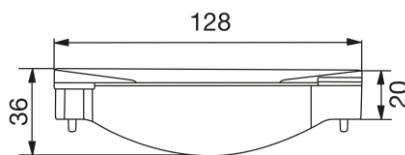

Top view

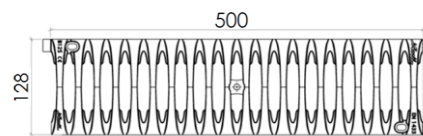

ACCESSORIES :

- The GR77 and GR77S gratings can be installed with these types of drainage channels :
 - High channel body Connecto width 130 : CAN177 and CAN177N
 - Shallow channel body Connecto width 130 : CAB773, CABS773, CAB134 and CAB133A
- The GR77K grating is compatible with all types of drainage channels except CAB134 and CAB133A.

- To fix a grating on CAB133A, it's necessary to use one FIXCAB13 (locking system with galvanized screw).
- To fix the GR77 and GR77S gratings on the CAN177, CAN177N, CAB773 and CABS773, it's necessary to use two FIXCAN (self-tapping screw).
- To fix the GR77K grating on the CAN177, CAN177N, CAB773 or CABS773, it must be fixed with the 2 screws provided (FIXGRK).



FIXCAN

FIXGRK



GR77 – GR77S – GR77K GRILLE PVC CLASS B125

TECHNICAL CHARACTERISTICS :

- Resistance class: B125
- Width: 128 mm
- Length: 500 mm
- Overall height: 36 mm
- Grating type: PVC
- Drainage surface: 471 cm²/ml
- Opening dimensions: 17 / 96 mm
- Weight: 0,8 kg

IMPLEMENTATION :

1. See the installation scheme opposite with the channel CAN177 and CAN177N.
2. See the installation scheme opposite with the channel CAB773 and CABS773.
3. See the installation scheme opposite with the channel CAB133A and CAB134
4. If you don't use Connecto channel, it is essential to have a flat surface and to leave a space between gratings to allow a free expansion.

