



Connecto® I Channel – Outside width 130mm - with slotted galvanized steel grating class A15


Code : DRP178



EN1433

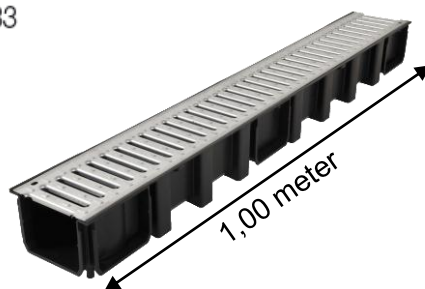

Bottom view



Side view



FUNCTION :

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking it can be used in private areas for all building applications, the environment of home, parks and gardens in class **A15**.

DESCRIPTION :

It consists of:

- an injected polypropylene body in black colour with male/female interlocking system
- one slotted galvanized steel grating class A15

ACCESSORIES :

The network connection can be realized thanks to the following PVC accessories :



- end cap/end or lateral outlet Ø100 or 110 : NAT178 or NAV178
- vertical outlet Ø100 or 110 : STCAN or SVCAN
- sump unit with outlet Ø100 or 110 : PSCVT or PSCVV

Grating can be fixed with self-tapping screw ref. FIXCAN1 (2 screws per grating).



CHARACTERISTICS :

Resistance class: A15
Effective width: 98 mm
Effective depth: 83 mm
Grating type: Galvanized steel
Drainage surface: 260 cm²/ml
Hydraulic section: 81 cm²
Opening dimensions: 9 / 82 mm
Weight: 2,8 kg

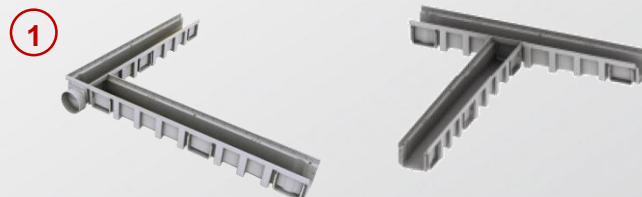


IMPLEMENTATION :

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

QUALITY - ENVIRONMENT :

ISO 9001
ISO 14001
BUREAU VERITAS
Certification

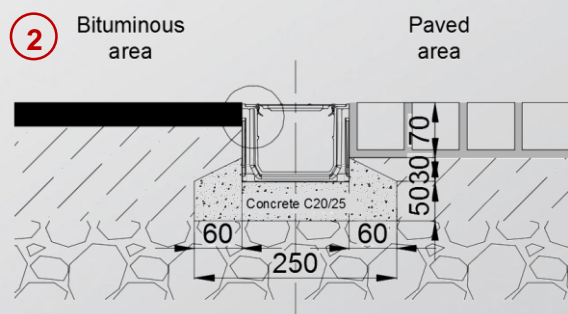

DATE : August 2015