
Nicoll


Kenadrain I Channel width 100, class C250

Code: DR102CF









FUNCTION:

This product permits to drain run-off water with gratings of length 1000 mm, of class C250 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

■ DESCRIPTION:

It is comprised of:

- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class C250
- two locking systems with galvanized metal bar



■ ACCESSORIES:

To connect the channels to the underground network:

- PVC end caps, vertical or lateral outlets (Ø100, Ø110 or Ø125)
- EKSO sump units manufactured also in PVC

■ CHARACTERISTICS:

Resistance class: C250 Effective width: 98 mm Effective depth: 135 mm Grating type: Cast iron


Drainage surface: 392 cm²/ml Hydraulic section: 122 cm² Opening dimensions: 18 / 96 mm

Weight: 12,6 KG



X = 150 mm; L = 440 mm

Z = 150 mm; Y = 90 mm; y = 85 mm

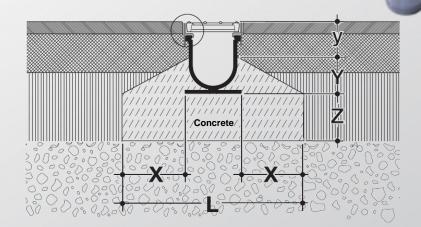

■ QUALITY- ENVIRONMENT:



December 2013



Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex

Email: export.nicoll@aliaxis.com