



GRC20 – GRC20S – GR20 – GR20S – GRC25 – GRC25S – GR25 – GR25S – GRC30 – GRC30S – GR30 – GR30S – GRC40 – GRC40S – GR40 – GR40S

FLOOR GRILLES

MAIN FUNCTION :

- Floor grids are used to collect rainwater. They are delivered with frame or not, in case of installation on a manhole.



DESCRIPTION :

- Floor traps injected in rigid PVC (UV stable) ;
- Color grey or sand to be in accordance with floor covering ;
- Admissible load 1,5 T. if we used concrete around the manhole.

STANDARDS/CERTIFICATES :


- Load class L15, in accordance with the NF EN1253-4 ;
- In accordance with standard for person with reduced mobility.



TECHNICAL CHARACTERISTICS:

Grid	A	B	C	D	E	F	G	H
GR20	200	200	73	14	20	40	21	21
GR25	250	250	98	17	20	40	21	21
GR30	300	300	125	14	20	50	21	21
GR40	400	400	112	17	20	60	21	21

Frame	I	J	K	L	M	N	O
CAGR20	233	233	30	5	25	5	10
CAGR25	283	283	30	5	25	5	10
CAGR30	333	33	30	5	25	5	10
CAGR40	433	433	30	5	25	5	10

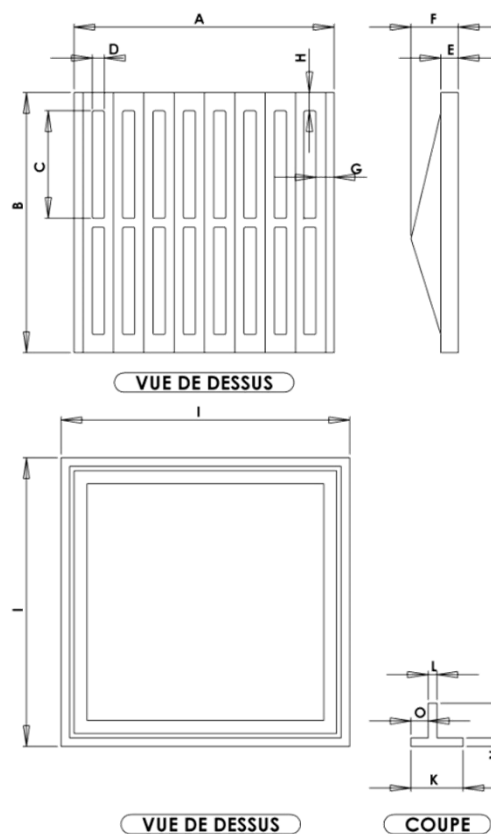

IMPLEMENTATION :

- The grid of 250 x 250 and 300 x 300 could be installed on the manholes for stormwater (RPCT & RETX).
- In case of installation with frame, this one need to be installed to assure level and it must be not deformed.

