

GRL77 / GRL77S / GRL77K
GRATING PVC - CLASS A15

BASIC FUNCTION :

- Enables the drainage of runoff waters. Complies with the NF EN 1433 standard and the **CE** marking. Can be installed in areas defined in the Group 1 Load Class A15 (pedestrians)
- This grating model respects the requirements for accessibility for people with reduced mobility 



DESCRIPTION :

- Reference :

GRL77

GRL77S

GRL77K*

- Colour :

Light grey

Sand

Anthracite

- Material : PVC, anti-UV treatment

* delivered with 2 screws (FIXGRK)

ACCESSORIES :

- GRL77 and GRL77S gratings can be installed with Connecto drain channels :
 - High channel body - width 130 : CAN177 and CAN177N
 - Shallow channel body - width 130 : CAB773, CAB773S, CABS773, CABS773S, CAB134 and CAB133A
- The GRL77K grating is compatible with all types of drainage channels except CAB134 and CAB133A



CAN177N



CAB773S



CABS773



CAB134

- To fix GRL77 and GRL77S gratings on CAN177, CAN177N, CAB773, CAB773S, CABS773 or CABS773S, it's necessary to use two FIXCAN (self-tapping screw)
- To fix GRL77 and GRL77S gratings on CAB134 or CAB133A, it's necessary to use one FIXCAB13 (locking system + screw)
- To fix GRL77K grating on CAN177, CAN177N, CAB773, CAB773S, CABS773 or CABS773S, it **MUST** be fixed with the 2 screws provided (FIXGRK)



FIXCAN



FIXCAB13




FIXGRK




GRL77 / GRL77S / GRL77K GRATING PVC - CLASS A15

TECHNICAL CHARACTERISTICS :

- Resistance class : A15
- Width : 128 mm
- Length : 500 mm
- Overall height : 20 mm
- Captation surface : 490 cm² / ml
- Slot dimensions : 15 / 80 mm
- Weight : 0.6 kg



Side view

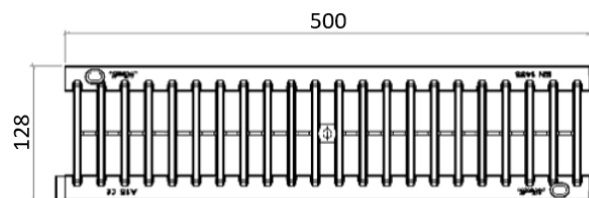

Top view

IMPLEMENTATION :

1. See the installation scheme opposite with the channel CAN177 and CAN177N
2. See the installation scheme opposite with the channel CAB773, CAB773S, CABS773 et CABS773S
3. See the installation scheme opposite with the channel CAB133A and CAB134
4. The grating must be set back 3 to 5 mm from the finished level
5. If you don't use Connecto channel, it is essential to have a flat surface and to leave a space between gratings to allow a free expansion

